

## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

Model No.	Ballast Type	Starting Type	Qty of Lamps	Lamp Type
BL-1315PS	ELECTRONIC	INSTANT START	1	PL-13(13W), PL-15(15W)

### ELECTRICAL CHARACTERISTICS

Input Voltage	Frequency	Lamp Watts	Input Watts	Input Current	THD	Power Factor	Sound Rated
120	60Hz	13W	12.6W	<0.21A	<150%	>0.50	A
Min. Starting Temp	Heat Protection Level	Outdoor Type	Open Circuit Voltage	Ballast Frequency	NO PCBs		
0°F/-18°C	CLASS P	TYPE 1	600V	>40KHZ			


### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS					
	Units	M	L	W	H	
	Inch	2.64	3.33	1.71	1.36	
	TOL(+/-)	0.05	0.05	0.05	0.05	
LEAD LENGTH						
Unit	Black	White	Red	Yellow	Green	Blue
Inch	7.88	7.88	5.52	/	/	5.52
TOL(+/-)	+0.5, -0	+0.5, -0	+0.5, -0	/	/	+0.5, -0

### BALLAST LABEL



### CIRCUIT

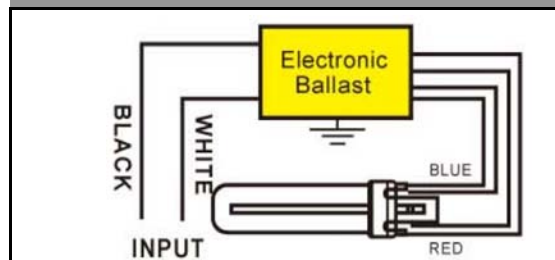

### USPAR ENTERPRISES INC.

ADD: 13404 Monte Vista Ave Chino, CA 91710  
 WEBSITE: [www.uspar.com](http://www.uspar.com)

TEL: 1-909-591-7506  
 FAX: 1-909-590-3220