

FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

Model No.	Ballast Type	Starting Type	Qty of Lamps	Lamp Type
BL-1820PT	ELECTRONIC	INSTANT START	1	PL-18(18W), PL-20(20W)

ELECTRICAL CHARACTERISTICS


Input Voltage	Frequency	Lamp Watts	Input Watts	Input Current	THD	Power Factor	Sound Rated
120	60Hz	18W	16.5W	<0.26A	<160%	>0.5	A
Min. Starting Temp	Heat Protection Level	Outdoor Type	Open Circuit Voltage	Ballast Frequency	NO PCBs		
0°F/-18°C	CLASS P	TYPE 1	600V	>40KHZ			

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS					
	Units	M	L	W	H	
	Inch	3.23	3.78	2.05	0.87	
	TOL(+/-)	0.05	0.05	0.05	0.05	
LEAD LENGTH						
Unit	Black	White	Red	Yellow	Green	Blue
Inch	9.06	9.06	9.06	/	/	9.06
TOL(+/-)	+0.5, -0	+0.5, -0	+0.5, -0	/	/	+0.5, -0

BALLAST LABEL

CIRCUIT

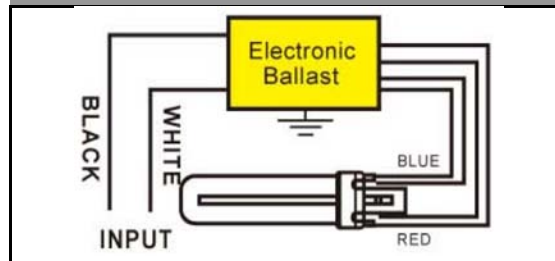

USPAR ENTERPRISES INC.

ADD: 13404 Monte Vista Ave Chino, CA 91710
 WEBSITE: www.uspar.com

TEL: 1-909-591-7506
 FAX: 1-909-590-3220