



FLUORESCENT BALLAST SPECIFICATIONS


DESCRIPTION

| Model No. | Ballast Type | Starting Type | Qty of Lamps | Lamp Type |
|-----------|--------------|---------------|--------------|------------------------|
| BL-3040CS | ELECTRONIC | INSTANT START | 1 | FC10T9, FC12T9, FC16T9 |

ELECTRICAL CHARACTERISTICS

| Input Voltage | Frequency | Lamp Watts | Input Watts | Input Current | THD | Power Factor | Sound Rated |
|--------------------|-----------------------|--------------|----------------------|-------------------|---------|--------------|-------------|
| 120 | 60Hz | 32W | 28.1W | <0.39A | <150% | >0.52 | A |
| Min. Starting Temp | Heat Protection Level | Outdoor Type | Open Circuit Voltage | Ballast Frequency | NO PCBs | | |
| 0°F/-18°C | CLASS P | TYPE 1 | 600V | >40KHZ | | | |


PHYSICAL CHARACTERISTICS

|  | CASE DIMENSIONS | | | | | |
|-------------------------------------------------------------------------------------|-----------------|----------|----------|----------|----------|------|
| | Units | M | L | W | H | |
| | Inch | 2.64 | 3.33 | 1.71 | 1.36 | |
| | TOL(+/-) | 0.05 | 0.05 | 0.05 | 0.05 | |
| LEAD LENGTH | | | | | | |
| Unit | Black | White | Red | Yellow | Green | Blue |
| Inch | 9.85 | 9.85 | / | 10 | 10 | / |
| TOL(+/-) | +0.5, -0 | +0.5, -0 | +0.5, -0 | +0.5, -0 | +0.5, -0 | / |

BALLAST LABEL



CIRCUIT

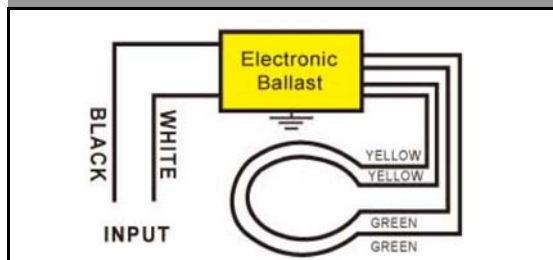

USPAR ENTERPRISES INC.

ADD: 13404 Monte Vista Ave Chino, CA 91710
 WEBSITE: www.uspar.com

TEL: 1-909-591-7506
 FAX: 1-909-590-3220